



3A LIGHTING ENGINEERS

Circa 400

Suspended or Surface Mount



FEATURES

- Australian designed and manufactured
- Satin or Gloss diffuser
- Suspended or surface mount

ALL MODELS

- 240VAC 50HZ input and over voltage protection
- Mounting: suspended or surface mount

LUMINAIRE CONSTRUCTION


- Black aluminium body
- Satin or Gloss diffuser

OPTIONS

- Different body colours on request
- DALI, Switch Dim or 0-10V dimmable available on request

SUGGESTED APPLICATIONS

- Cafes and restaurants
- Clubs
- Medical facilities
- Office and retail spaces
- Schools and universities
- Shopping centres
- Walkways and stairwells

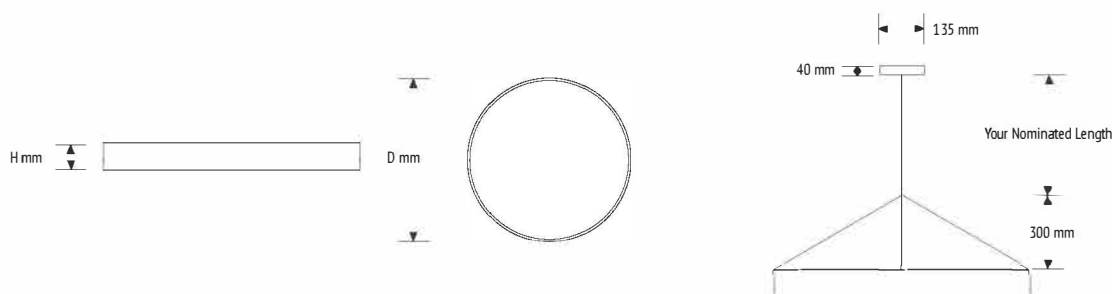

	Model	Light Source/Lamp	Lumen Luminaire 3000K (lm)	Lumen Luminaire 4000K (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
													H	D	
Surface Mount	CIRC40018W-XXX	LED	1382	1447	18	21	80	0.96	16	SMD	Nichia	IP20	80	400	6
	CIRC40022W-XXX	LED	1690	1769	22	26	80	0.98	16	SMD	Nichia	IP20	80	400	6
	CIRC40027W-XXX	LED	2074	2171	27	32	80	0.97	16	SMD	Nichia	IP20	80	400	6
Pendant	CIRC40018W-XXXP	LED	1382	1447	18	21	80	0.96	16	SMD	Nichia	IP20	80	400	6
	CIRC40022W-XXXP	LED	1690	1769	22	26	80	0.98	16	SMD	Nichia	IP20	80	400	6
	CIRC40027W-XXXP	LED	2074	2171	27	32	80	0.97	16	SMD	Nichia	IP20	80	400	6

NOTE: XXX denotes CRI and colour temperature. E.g: CRI 80 and 3000*K = 830.



3A Lighting Engineers. U4 / 14 Audsley Street. Clayton Vic 3168
 Ph: 03 9543 6913 F: 03 9532 1377 M: 0435 357 592
 E: info@lightingengineers.com.au W: www.lightingengineers.com.au

